


Arbeitsplatzleuchte mit 250 mm-Metall-Schwannenhals

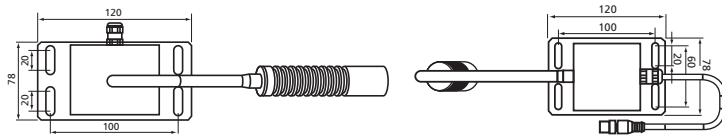

| Typ | Abstrahlwinkel (°) | Lichstrom [Lumen] | Helligkeit [lux] 1m/1,5m | Lichtkegel-Ø (cm) 1m/2m | Schutzart | Spannung [VDC] | Leistungsaufnahme [W] | max. Umgebungstemp. [°C] | 1 Stk. | 2 Stk. | 5 Stk. | 10 Stk. | ab 25 Stk. |
|---------|--------------------|-------------------|--------------------------|-------------------------|-----------|----------------|-----------------------|--------------------------|--------|--------|--------|---------|------------|
| ML-5-H | 8 | 250 | 600/150 | ca. 45/60 | IP65 | 12...30 | < 7 | 45 | 249.30 | 229.30 | 217.30 | 213.30 | 209.30 |
| ML-5-V | 8 | 250 | 600/150 | ca. 45/60 | IP65 | 12...30 | < 7 | 45 | 249.30 | 229.30 | 217.30 | 213.30 | 209.30 |
| ML-10-H | 22 | 650 | 2100/540 | ca. 35/70 | IP65 | 12...30 | < 10 | 45 | 366.90 | 346.90 | 334.90 | 330.90 | 326.90 |
| ML-10-V | 22 | 650 | 2100/540 | ca. 35/70 | IP65 | 12...30 | < 10 | 45 | 366.90 | 346.90 | 334.90 | 330.90 | 326.90 |