





Lampe de poste de travail avec col de cycle métallique de 250 mm

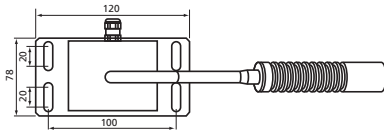

Type	Angle de rayonnement (°)	Luminosité [Lumen]	Clarté (lux) 1m/1,5m	Ø du cône lumineux (cm) 1 m/2 M	Type de protection	Tension [VDC]	Puissance absorbée [W]	Température ambiante [°C]	1 unité	2 unités	5 unités	10 unités	A partir de 25 unités
ML-5-H	8	250	600/150	ca. 45/60	IP65	12...30	< 7	45	249.30	229.30	217.30	213.30	209.30
ML-5-V	8	250	600/150	ca. 45/60	IP65	12...30	< 7	45	249.30	229.30	217.30	213.30	209.30
ML-10-H	22	650	2100/540	ca. 35/70	IP65	12...30	< 10	45	366.90	346.90	334.90	330.90	326.90
ML-10-V	22	650	2100/540	ca. 35/70	IP65	12...30	< 10	45	366.90	346.90	334.90	330.90	326.90